


EMTx40 EM Transmitter - 5 Cell Lithium

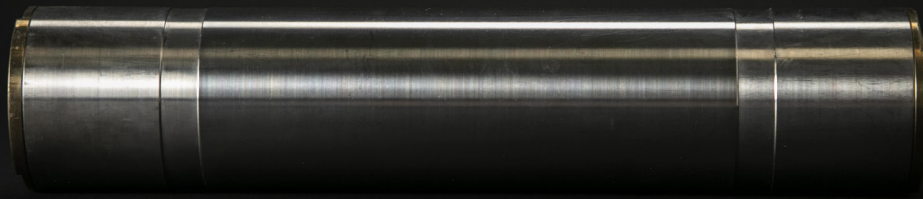

The EMTx40 transmitter is an ATEX/IECEX certified electromagnetic (EM) transmitter that can be used for pig tracking and locating functions, intended for use in pipeline diameters of 10" and above. The transmitters operate effectively in every type of pipeline, i.e. top-side, buried, gas or liquid and in pipeline bundles where acoustic transmitters are either less effective or ineffective.

Key Benefits

- Exact location of the transmitter can be determined to within a few cm by detecting the inherent EM null spot of the transmitter.
- Self-regulation ensures the signal strength is constant over the battery's lifetime.
- High-power version available for scenarios where factors such as wall thickness and burial depth make applications more challenging
- Bluetooth connection and IK Trax's EMTx CONFIG Application allows transmitter parameters such as pulse rate, pulse width and power output to be modified by the user providing flexibility to manage signal strength and battery requirements.
- Several activation methods designed to conserve battery life when deployed in advance of pigging operations including Digital Pressure Sensor, allowing pressure to be configured via CONFIG App. .
- Mounting holes are built in to aid centralising the transmitter within a pig body, eliminating the need for a transmitter carrier. This dramatically increases the received EM signal.

Interested in hearing more about this, or other applications?
Contact our IK Trax specialists at:

IK Trax
T: +44 (0)1224 714714
E: Sales@iktrax.com

EMTx40 EM Transmitter - 5 Cell Lithium

The standard transmission frequency is 22Hz however the frequency is configurable between 10Hz and 30Hz. Once the approximate location of the transmitter has been established using an EM Receiver with the antenna held parallel to the pipeline/transmitter, the exact location can be determined to within a few cm by orientating the antenna perpendicular to the pipe and detecting the inherent EM null spot of the transmitter.

The EMTx40 series offers several activation methods designed to conserve battery life when deployed in advance of pigging operations including bleedscrew, pressure switch and delayed activation. These methods may be used individually or in combination. Contact IK Trax to discuss your individual requirements.

The received signal strength is dependent on several factors and frequency, signal strength and transmission pattern can be configured to achieve the desired balance between detectability and battery life.

PRODUCT SPECIFICATION*

Battery Type (Alkaline)	5x SAFT LS 33600 Cells
Frequency Range	10Hz to 30Hz
Temperature Range (Alkaline)	-40°C to + 85°C (-40°F to + 176°F)
External Pressure Rating	500bar (7252Psi)
Standard Version Signal at 1m	650mVpp (with IK Trax reference antenna in air)
High Power Version Signal at 1m	900mVpp (with IK Trax reference antenna in air)
Pipeline Compatibility	12"-48", WT < 45mm (standard version) <50mm (high power)

BATTERY LIFE DATA

Based on measurements taken at 5°C and 100% power. Standard version only

Continuous	1-sec pulse	2-sec pulse	3-sec pulse	4-sec pulse	5-sec pulse
4 days	9 days	16.7 days	23.6 days	29.9 days	35.3 days

MATERIALS & DIMENSIONS

Housing Material	ASTM B348 Grade 5 Titanium Ti-6Al-4V
Endcap Material	Alloy Bronze CA 104 EN 12163
O-Ring Material	NBR70
Length	374mm (14.7")
Diameter	76.8mm (3.02")
Transmitter Weight (including batteries)	7kg (15.5lbs)

CERTIFICATION

ATEX/IECEX/UKEx Code	Ex II 2 G Ex db IIB+H2 T6...T5 Gb
EU Type Examination Number	ERO 23 ATEX 0011X

*Product Specification should be used as a guideline for transmitter selection. For confirmation of the most suitable transmitter for your application, please contact our team.

Interested in hearing more about this, or other applications?
Contact our IK Trax specialists at:

IK Trax
T: +44 (0)1224 714714
E: Sales@iktrax.com